

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B110/18**

(3) Product: **Anchor device type A**
Type: LUX-top® Abseilpunkt

(4) Manufacturer: **ST Quadrat S.A.**
11, rue Flaxweiler
6776 Grevenmacher / Potaschberg
Luxemburg

(5) Manufacturing plant: **ST Quadrat Fall Protection S.A.**
45, rue Fuert
5410 Beyren
Luxemburg

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this type examination certificate.

(7) The certification body of DEKRA EXAM GmbH certifies that this product comply with the fundamental requirements of the standard listed under item 8 below. The examination and test results in the test and assessment report PB 17-306.

(8) The requirements of the standard are assured by compliance with

DIN EN 795:2012

DIN CEN/TS 16415:2017

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.


(10) This Type Test Certificate is valid until 2023-05-14.

DEKRA EXAM GmbH
Bochum, 2018-05-15

signed: Wiegand
Certification body

signed: Mühlenbruch
Special services unit

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Certification body


Special services unit

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B110/18
- (13) 13.1 Subject and Type
Anchor device type A
Type: LUX-top® Abseilpunkt

13.2 Description

The anchor device, type: LUX-top® Abseilpunkt is used as a single anchor point to secure a maximum of three persons against falls from a height (fig. 1) and is intended for mounting on substrates with sufficient strength.

The anchor device is made of corrosion-resistant steel (galvanized) or stainless steel.

The anchor device consists of a base plate (250 mm x 250 mm) with four holes (Ø 14 mm) receiving the fastening elements.

Centrally on the base plate a support with a sleeve (H = 400 mm - 700 mm, Ø 48.3 mm) is welded.

At the upper end of the support a ring eyelet is screwed securely. The user can attach his PPE against falls from a height to this eyelet.

The anchor device is intended for load from any direction parallel to the roof surface.

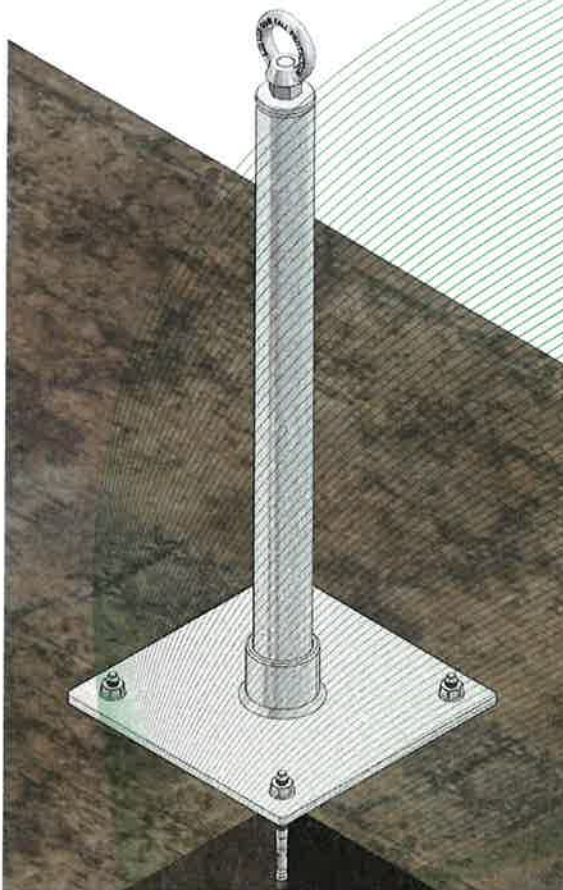


Fig. 1: Anchor device, type: LUX-top® Abseilpunkt (mounting example)

- (14) Test and Assessment Report

PB 17-306 dd. 2018-05-15