

LUX-top® ASP EV 2 Ø18

for attaching to concrete components



MOUNTING SURFACE:

- Concrete components with min. component thickness of 80 mm and min. concrete class C20/25



FIXING MATERIAL:

- 4 pcs. concrete anchor bolt FAZ II 10/20 A4



MATERIAL:

- Stainless steel W1.4301 / AISI 304
- Corrosion resistance class CRC II to EN 1993-1-4



CERTIFICATION/APPROVAL:

- Type Examination Certificate to EN 795 type A, certificate no. ZP/B225/19



USERS:

- max. 3 users






POSSIBLE COMBINATIONS:

- combination with temporary horizontal anchor device
- intermediate point in LUX-top® FSE 2003 stainless steel rope system
- anchor point can be extended up to 400 mm with LUX-top® Extension Ø18



PRODUCT HIGHLIGHTS:

- up to 800 mm height
- minimal depth of anchoring into concrete necessary

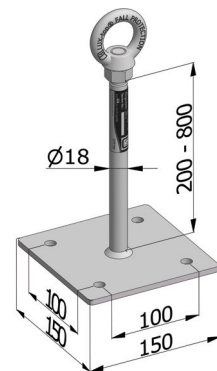

You can find further information here: 

www.lux-top-absturzsuren.de/en/asp-ev2